



ASSEMBLY GUIDE












168370-0xx-00-xx

Railing base

EASY GLASS® SMART+ HIGH F - Base shoe, top mount

For adjustable glass fixation

Q-INFO MOD 8370

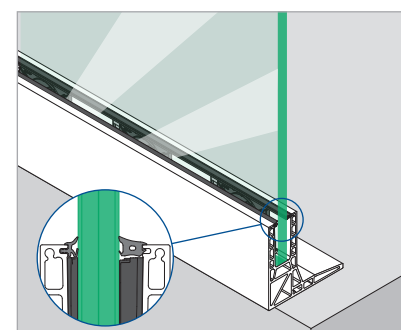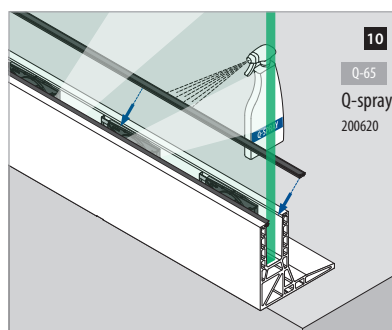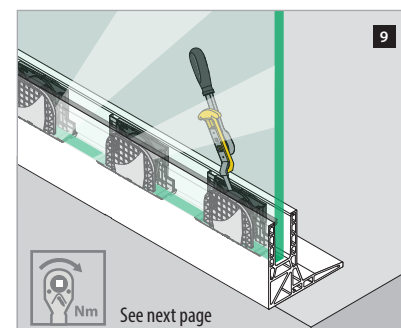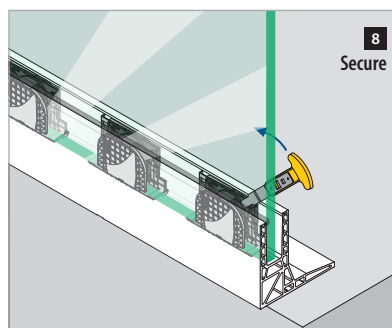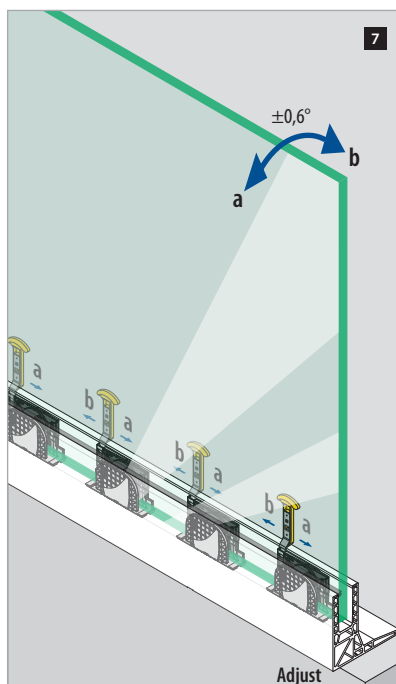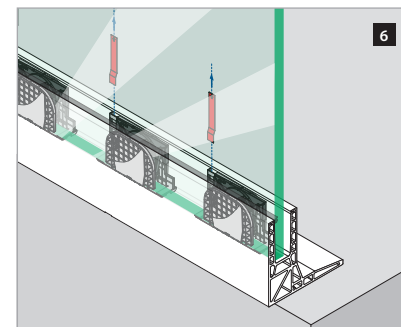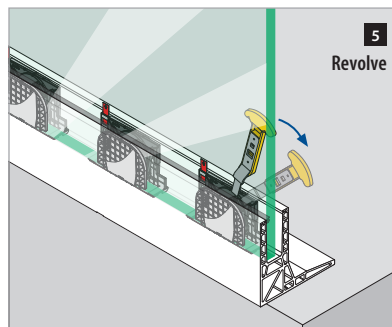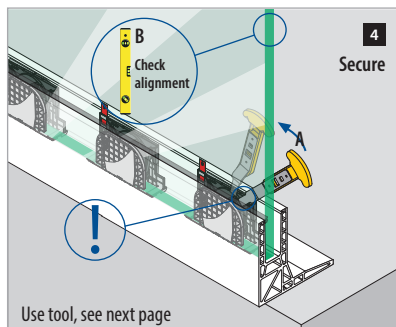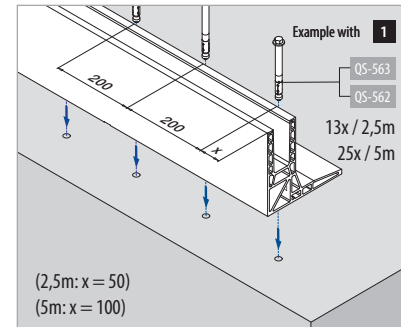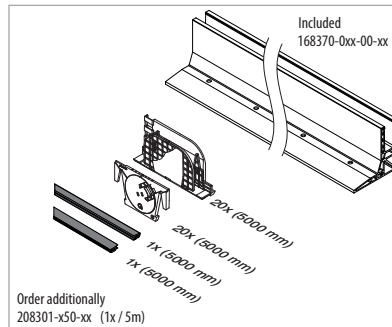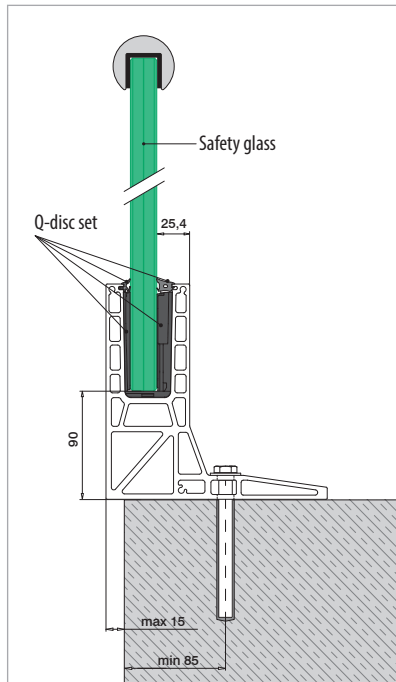







Q-disc® System


Q-disc and inlay tool

For adjustable glass fixation

Q-INFO MOD 8301 / 1000

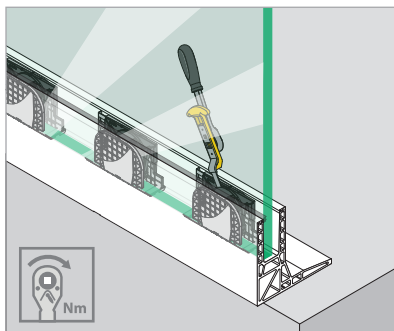

T_{inst} (disk): 32Nm

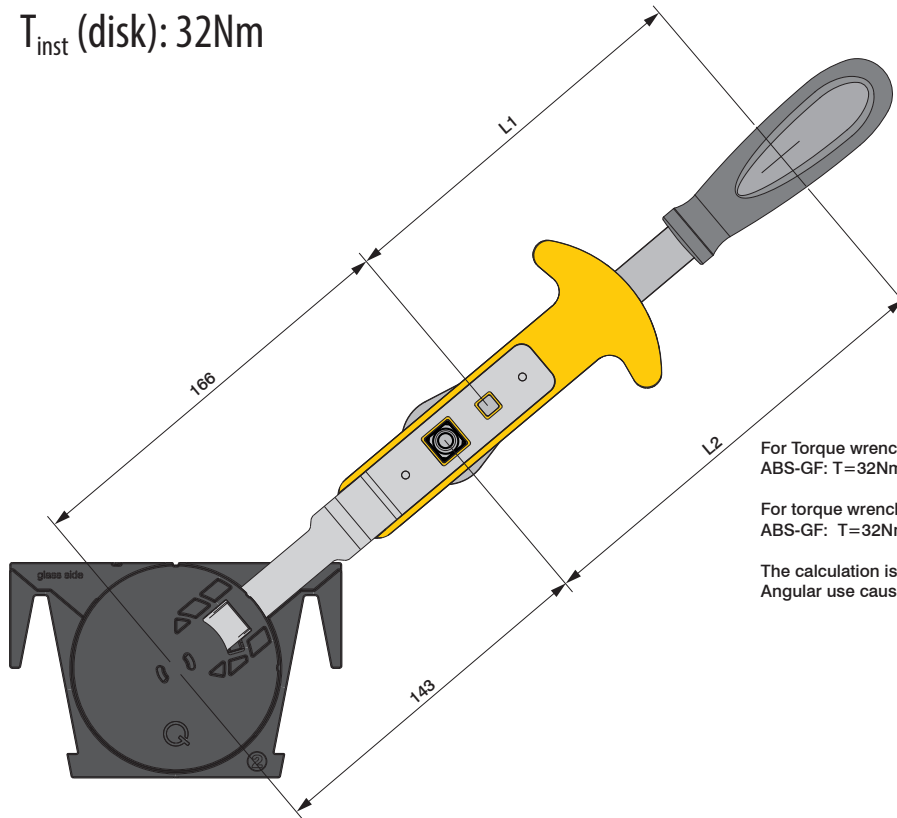

For Torque wrench 1/4":
ABS-GF: $T = 32Nm \cdot L1 / (L1 + 166mm)$

For torque wrench 1/2":
ABS-GF: $T = 32Nm \cdot L2 / (L2 + 143mm)$

The calculation is valid for straight-lined use.
Angular use causes different torque.